


Vacuum bench B3L spraying system S8 and tank CA

Item I3L88

The machine is composed by: - Vacuum bench, designed to be used in three modes: simply placed on the workbench to have an extraction on the top, housed on an existing bench and inserted into an opening in the working surface by using the special brackets to lock it, placed on top of a practical trolley that can be supplied separately. The module is equipped with a silent and powerful motor to offer a greater capacity of containing the nebulization. - Spray gun G6 designed for both precise and large areas bonding. In particular it is possible to spray the glue from a minimum of 3 mm up to a maximum of 50 mm. -Stainless steel tank 5 lt. capacity.

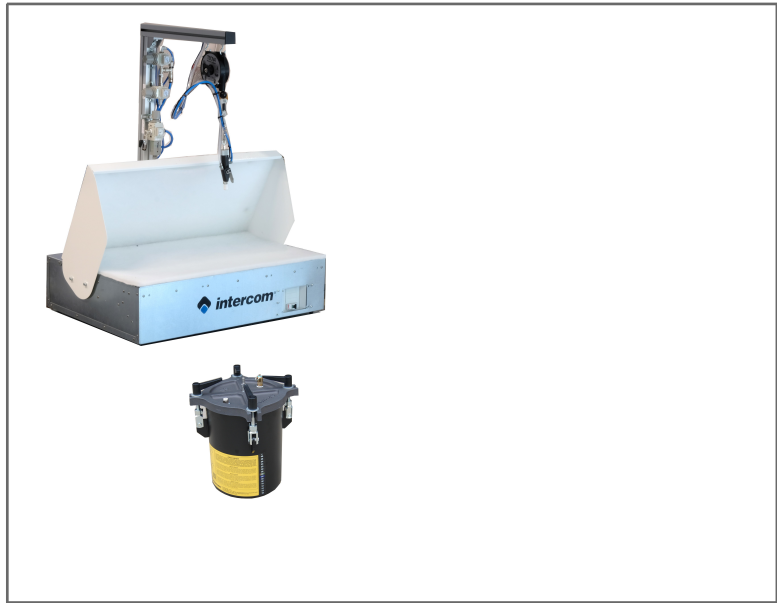

The operator, after starting the machine, can place the materials on the working plane so to make maximum use of the intake on the working plane for both keeping the materials standing and absorbing the nebulized adhesive. All the spray gun functions can be adjusted: quantity of adhesive, width of jet and quality of distribution even on different thicknesses. For a proper functioning of the vacuum bench it is recommended to replace the filter each time is visibly dirty or when the vacuum bench is not intaking properly. A jet of air immediately before and after the adhesive nebulization keeps the nozzle constantly clean. Our systems are maintenance free. The tank is conceived in a way that allow the use of the adhesive in bag in box avoiding to make dirty the tank and to filter the glue thus preventing the contact with air which can alter its properties.

Technical Data:

04/11/2025

Capaciy m3/h: 800	Volt: 230	Pressure head: 70	Air (lt/min):	Bar: 6
Decibel: 63.3	Watt: 102/135	Hertz: 50/60	Ampere: 0.45/0.60	Average Consumption:
Gross Weight: 34	Tare (kg): 3	Lenght (mt): 0,57	Height (mt): 0,82	Volume (m3): 0,35
Net Weight: 31		Width: 0,75	Working surface (cm): 75 x 42	